




A storage unit is hinged to the wall in a basement corner. It is tilted-up to rest on stacked brick or concrete block and filled for overhead protection.

## HOME FALLOUT SHELTER tilt-up storage unit shelterbasement location



FEDERAL EMERGENCY MANAGEMENT AGENCY

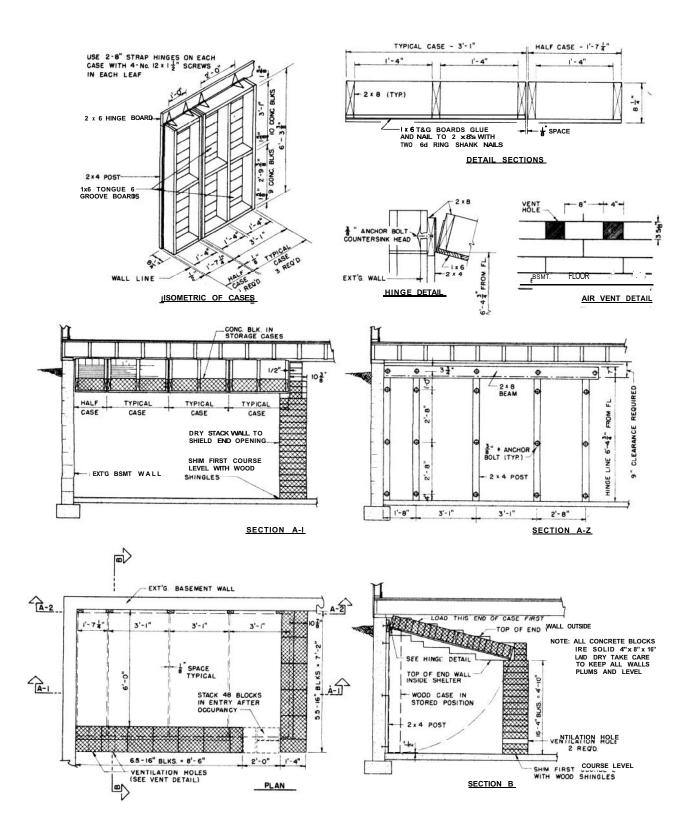

## GENERAL INFORMATION

The principal feature of this shelter is a roof composed of tilt-up storage units, the top of which is hinged to the wall. The units can be used as book cases, pantry shelves, or for miscellaneous storage. In an emergency, the storage units can be tilted up so that they rest on a stacked masonry wall built from materials stored nearby the units.

In basements where the outside ground level is above the top of the tiltedup units, adequate shelter from fallout radiation is provided by filling the units with brick or solid concrete block 8" thick. The shelter will house 6 people.

Approximately 2 man days are required to construct the storage units. The materials are readily available, from retail lumber yards.

## MATERIALS LIST

	Actual
Item	Number Reauired
Masonry:	
4" x 8" x 16" solid concrete masonry units or	575 blocks or
2-l/4" x 4" x 8" solid bricks	3450 bricks
Lumber: ("Construction" or "No. 1" grades or better)	
posts 2 x 4 x 6'-4-l/4"	5 pieces
beam 2 x 8 x 10'-11-5/8"	1 piece
3 cases plus half case	1
2 x 8 x 6'-3-3/8"	8 pieces
2 x 8 x 6'-O-1/8"	3 pieces
2 x 8 x l'-4"	9 pieces
2 x 8 x 2'-9-5/8"	6 pieces
1 x 6 x l'-7-l/4" T & G*	13 pieces
1 x 6 x 3'-1" T & G *	39 pieces
Hardware :	
3" x 8" x 1/8" unfinished steel strap hinges	8
#12 x $l-1/2$ " wood screws, c. s.	64
3/8" diam. x 6" square head unfinished anchor bolt	s 20
3/8" bolt size multiple-expanding machine bolt	
anchor	20
6d ring shanked nails	3 pounds
glue, protein emulsion (must develop 450 lbs. /sq. in.) l-1/2 pints	
16d common nails	3 pounds
*Causana adaa haanda mari ha ugad	

\*Square edge boards may be used.

Special tools :

bubble level to insure wall is level as it is stacked 3/4" star drill for making anchor holes in existing basement wall

## CONSTRUCTION SEQUENCE

1. Prepare wood case units.

a. Assemble wood units in accordance with drawings on sheet 2.

b. Fasten hinges to hinge board with l-l/2" #12 \* wood screws. c. Locate and drill holes in basement walls to receive machine bolt anchors.

d. Bolt hinge board and  $2 \ge 4$  posts to wall with 3/8" anchor bolts.

e. Fasten wood case units to hinges with 1-1/2" #12\* wood screws.

2. Provide suitable storage location for required concrete block.

3. Assembly of shelter.

a. Remove items stored from wood case units.

b. Mark location of shelter walls on floor with chalk.

c. Move concrete blocks lo shelter location.

d. Lay first course of blocks for shelter walls, shimming block as required with wood shingles until course is level. It is important that the wall be stacked as nearly level and plumb as possible for stability.

e. Tilt up case units in corner of basement and support temporarily with  $2 \times 4$  prop or household step ladder. Build-up 16" concrete block wall to support case units.

f. Remove prop, lower case units to block wall and fill case units with concrete blocks.

g. Build end wall up above the side of the end storage unit.

h. Move 48 concrete blocks into shelter.

i. Occupy shelter and fill entry with 48 blocks.

\* Drill lead holes 5/32" in diameter, 1-3/8" deep and shank lead holes 3/16" in diameter, 3/8" deep.